NOTES:

1. BENCHMARK – "X" CUT ON FLANGE BOLT OVER MAIN OUTLET OF FIRE HYDRANT AT THE SOUTHWEST CORNER OF CENTERVILLE ROAD AND STONE CREEK ROAD. ELEVATION 375.00 (U.S.G.S.)
2. DEPTH OF WATER LINES SHOWN ON THIS PLAN VARY IN DWPTH FROM 3 TO 4 FEET AS PER VERBAL CONTACT WITH LANCASTER CITY WATER AUTHORITY.
3. THE BEARING BASE FOR THIS SURVEY IN ASSUMED AND MATCHES PREVIOUSLY RECORDED WOOD'S EDGE DEVELOPMENT PLANS.
4. LOCATIONS OF UNDERGROUND UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND WERE OBTAINED BY FIELD LOCATION AS MARKED BY UTILITY COMPANIES, OR FROM DESIGN AND AS-BUILT PLANS SUPPLIED TO US BY UTILITY COMPANIES. ALL UNDER-GROUND UTILITY LOCATIONS MUST BE MARKED AND VERIFIED BY THE INDIVIDUAL UTILITY COMPANIES PRIOR TO ANY EXCAVATION OR CONSTRUCTION.

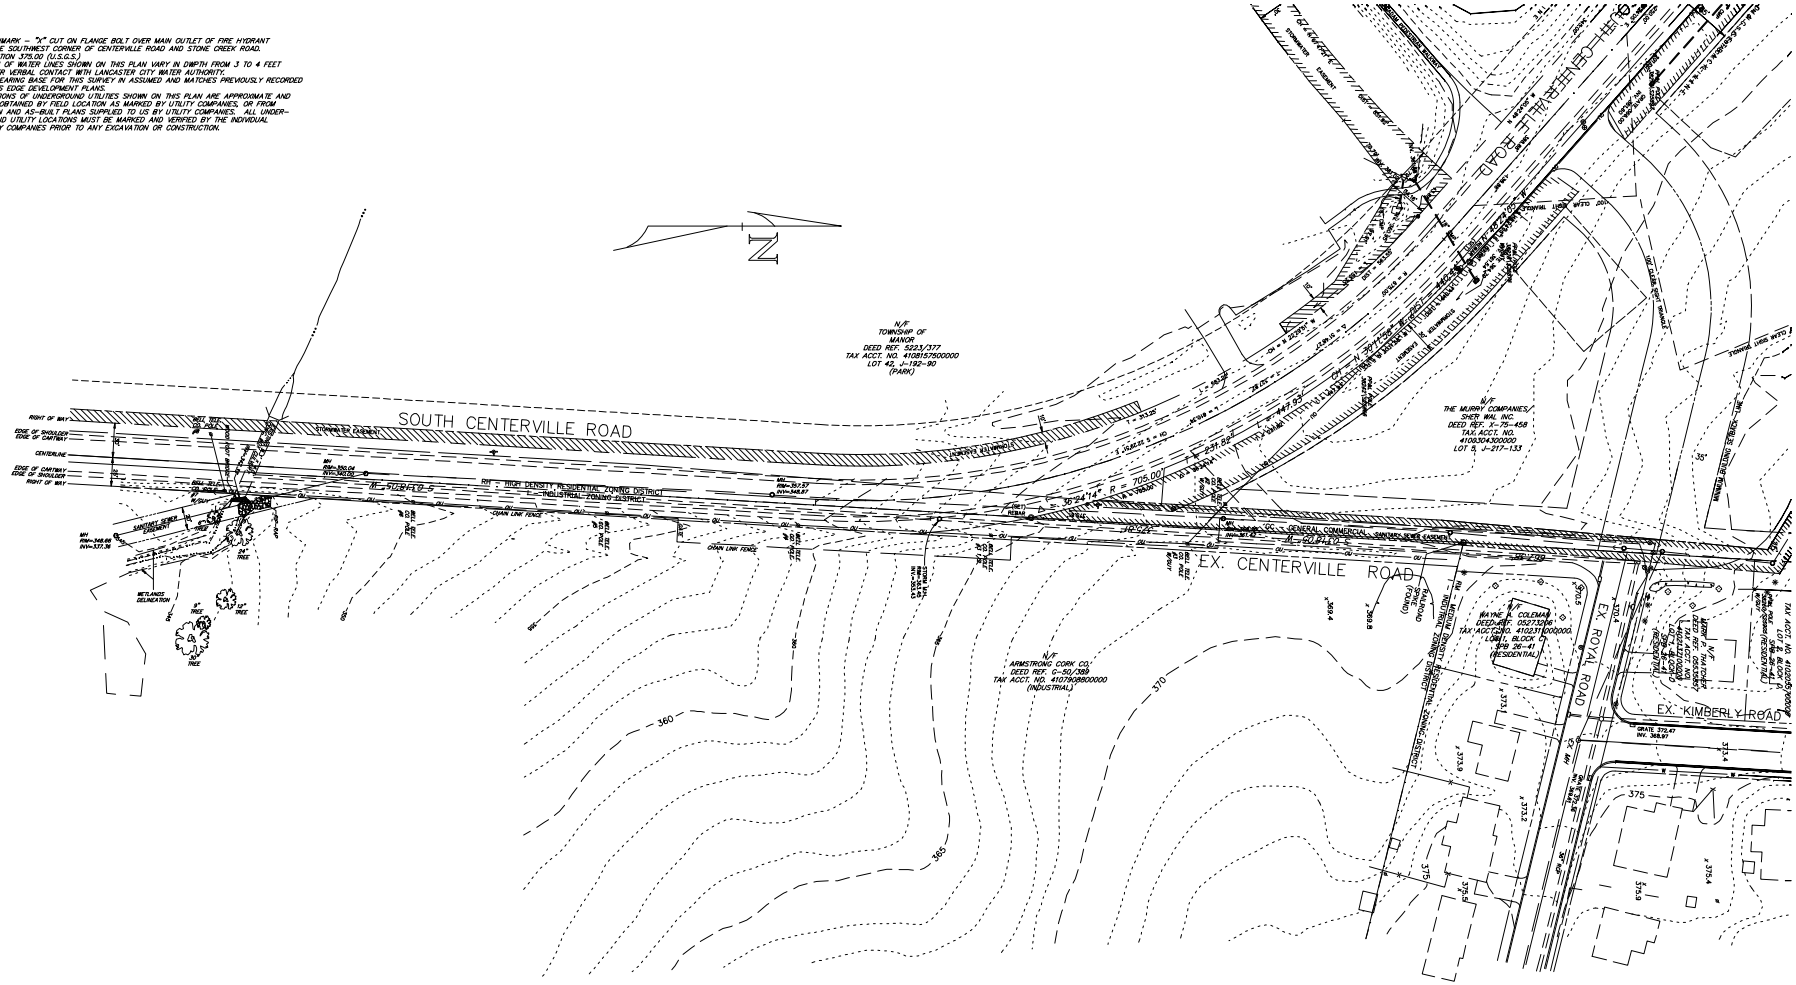

GRAPHIC SCALE

50 0 50 100

(IN FEET)
1 inch = 50 ft.

DATE	REVISION

TOPOGRAPHIC SURVEY
A PORTION OF
ARMSTRONG CORK COMPANY
SOUTH CENTERVILLE ROAD

MANOR TOWNSHIP
MARCH 15, 2007
JOB NO. 4056

LANCASTER CO., PA.
SCALE: 1" = 50'
DWG. NO. L-924-ARM

WEBER SURVEYORS, INC.
1076 CENTERVILLE ROAD
LANCASTER, PENNSYLVANIA 17601
Phone (717) 898-9466 Fax (717) 898-9567